




Model
Main chip set
Network Type
Frequency Scope
Data Rate
Support System
Ethernet network
USIM/SIM
SD Card
LED
Power supply mode
Power
WIFI Standard
WIFI Frequency
WIFI Security mode
Operation Temperature
Operation Humidity
Storage Temperature
Dimensions/Weight

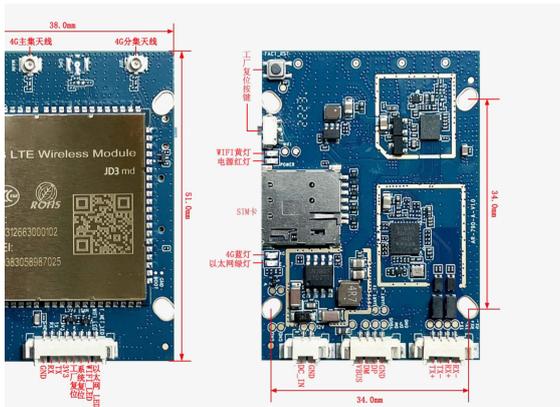

P700	Which can change 4G wireless network to RJ45 cable network
ASR1803S	
FDD-LTE, TDD-LTE, WCDMA/HSPA+	
LTE B1/B3/B8/B38/B39/B40/B41 (More bands can be added such as B2/4/5/7/20...)	
TD-SCDMA B34/B39	
WCDMA 2100/900MHz	
LTE FDD/TDD (Cat. 4) DL 150Mbps, UL 50Mbps	
3G HSPA+ DL 21Mbps, UL 5.76Mbps	
3G TD-SCDMA DL 2.8Mbps, UL 2.2Mbps	
Windows XP, Windows Vista, Windows 7, Windows 8/8.1	
MAC OS X 10.7+	
A RJ45 interface, 10/100M adaptive, Support WLAN	
Micro SIM card slot	
Support Micro SD memory extension, 32GB in max	
2G/3G/4G signal indicator light, WIFI status indicator lamp	
DC 12V	
Input voltage: 12V/1A	
maximum power consumption: < 2.5W	
Protocol: 802.11 b/g/n, up to 72Mbps	
2412 MHz-2472 MHz	
Open, WPA-PSK, WPA2-PSK	
-20°C ~ +70°C	
10%-90%	
-40°C ~ +85°C	
51mm*38mm*1.0mm / 15g	